

# 20' Offshore Half Height

20' x 8' x 4'3"


Open Top with Side Door  
DNV/ISO Corner Castings

DNV Certification Note 2.7-1: Offshore Containers  
EN 12079: Offshore Containers

ISO/TC 104

The Customs Convention on Containers CCC/TIR

The Convention for Safety Containers CSC  
Classification Society: Lloyd's Register

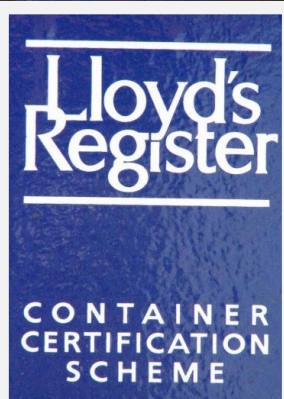

## DNV/ISO Corner Casting

Stackable Container

Allows for any intermodal means of transportation

Handling Options: Forklift, Crane or Top Lift

Truck, Rail or Ocean Transport

### Includes

DNV Certified IWRC Wire Rope Lifting Sling

Equipped with Crosby Safety Pin Bow Shackles

And Flemish Steel Splice Terminations



### Dimensions

L x W x H

20' x 8' x 4'3"

#### External

6058 mm (19'10")

2438 mm (8')

1280 mm (4'2")

#### Internal

5862 mm (19'2")

2214 mm (7'2")

942 mm (3'1")

Door Opening: 2,270 mm width

#### Ratings

#### As ISO

20,000

17,310

2,690

Max Gross

Payload

Tare (+/- 2%)

#### As Offshore

12,690 kg

10,000 kg

2,690 kg